



Model DS101

Tripod Turnstile

DS101 tripod turnstile are compact and cost-effective entrance/exit security solutions.

Featuring a traditional stainless steel construction, this product boasts a durable structure and a timeless design reminiscent of traffic lights, making it a stylish and enduring choice.

Features

- Two way or one way working.
- 304/316 stainless steel material.
- Support integrated with any type of access control systems.
- Lower power consumption.
- Low noise, system runs smoothly.
- Green and red LED indicator display passing status.
- Anti-tailing function: only one person passes at one time.
- Fire safety requirements, arms drop down automatically.
- Easy to install and maintain.
- 3 years warranty support.

Customized Service


- Appearance color can be customized based on installation environment.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- It can support customized integration of various access control solutions.
- Picture: high resolution and 3D renderings pictures can be customized.




Logo Custom



LED Indicator

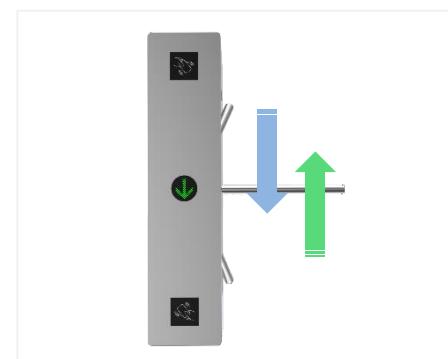

Single/Bi-directional Selectable

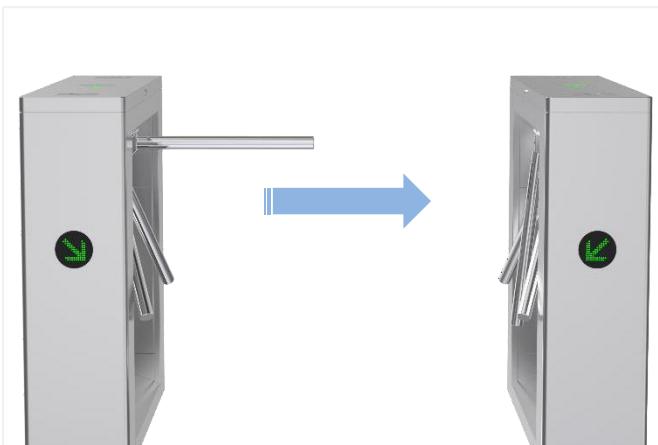

Arms Drop Down for Fire Safety Requirements



Anti-trailing Function: one person can pass at one time

Access Control System

Daosafe turnstile gates can be well integrated with any 3rd party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein


DS101 with card solution installed at university




Specifications

Model No.	DS101
Type	Tripod Turnstile
Brand	Daosafe
Certifications	Compliance CE, ROHS, FCC
Framework Material	304 Stainless Steel
Arm material	Stainless Steel
Dimension	1200*280*1000mm
Net Weight	55kg/pcs
Passage Width	550mm
Passing Direction	Single directional/Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-20 °C - 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor/Outdoor
Flow Rate	35 people per minute
LED Indicator	Two LED indicators on top: green → entry, red ✗ no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Arms will drop down automatically
Flexibility	Integrate with any access control

Side View

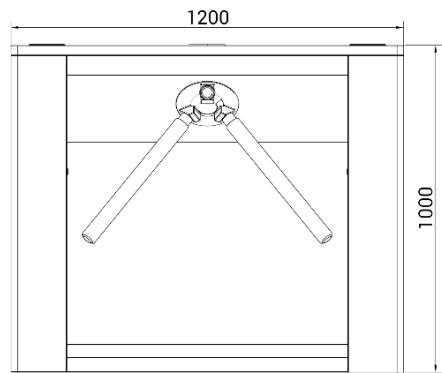

Front View

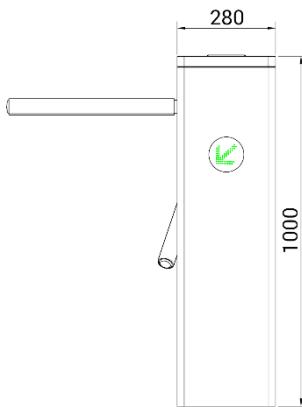

Top View

