



## Model DS408FS

### Full Height Turnstile with Canopy

DS408FS canopy full height turnstile the most obvious feature is that the turnstile with solid rain protection roof to resist bad weather and intrusions and with bicycle gate for pedestrian and wheelchair access. Which provides a high safety and convenient access solution for both pedestrian and disabled.

It supports 900mm for wheelchair access, and supports 660mm standard gate for pedestrian access.

## Features


- Two way or one way working.
- Canopy protect the gate from the bad weather.
- Support 900mm for wheelchair, 660mm for pedestrian.
- The movement with absorber structure, making the product operate very quietly and runs smoothly.
- Lock structure: security can control both entry and exit, for example, in case of power failure, people can exit but cannot enter unless authorized by security.
- Green and red LED indicator display passing status.
- Outdoor/indoor use
- Fire safety requirements, arms open automatically.
- Easy to install and maintain.
- 3 years warranty support.

## Customized Service

- Appearance color can be customized based on installation environment.
- Material optional.
- Dimensions can be customized to meet your request.
- Logo can be customized.
- Picture: high resolution and scene picture can be customized




Logo Custom

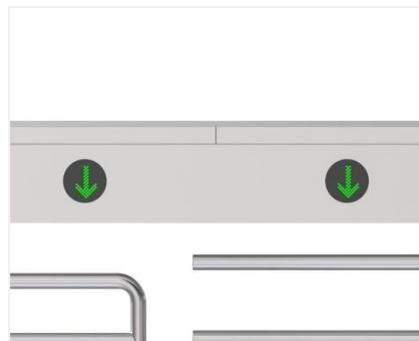

LED Light



Canopy Protect

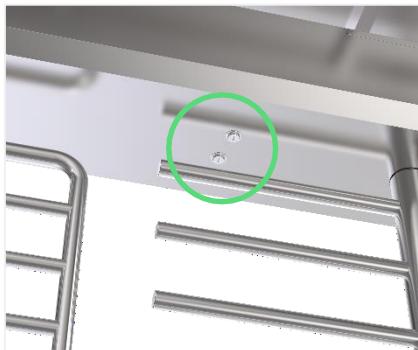

Manually Control Entry Direction



660mm For Pedestrian, 900mm For Wheelchair

## Access Control System

Daosafe turnstile gates can be well integrated with any 3<sup>rd</sup> party access control systems



Card Solution



QR/Bar Code Solution



Biometric Solution



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein



## Specifications

Model No.	DS408FS
Type	Full height turnstile with canopy
Brand	Daosafe
Framework Material	304 full stainless steel
Arm Support	120° rotors with 3 sections
Dimension	2450 * 1264 * 2580mm
Net Weight	430kg/pcs
Passage Width	2 lanes: 660mm/lane (for pedestrian) 900mm/lane (for wheelchair)
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-15 °C - 60 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor
Flow Rate	30 people per minute
LED Indicator	Two LED indicators on top: green → entry, red ✗ no entry
Communication	Dry contact, Relay signal, RS485
Emergency	Automatic arm open when power off
Flexibility	Integrate with any access control



## Dimensions

Front View

Side View

Top View

