






Description


The JSL-I1-1 is a SIP video door phone combining access control, intercom, and security in a durable IP66/IK07-rated design. It features a 2MP camera, supports multiple unlocking methods, and enables one-touch audio/video calls. Compatible with SIP and ONVIF, it integrates easily with major security platforms—ideal for upscale residences, offices, communities, and industrial parks.



Main Feature

-  Brand new digital keypad design with color backlight for an enhanced user experience
-  Equipped with a 2mega-pixel HDR high-definition camera, it provides clearer imaging.
-  IP66 & IK07 high protection rating, wide temperature operation, suitable for harsh outdoor environments.
-  Equipped with a wide range of interfaces for connecting various security devices.
-  Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility.

Community

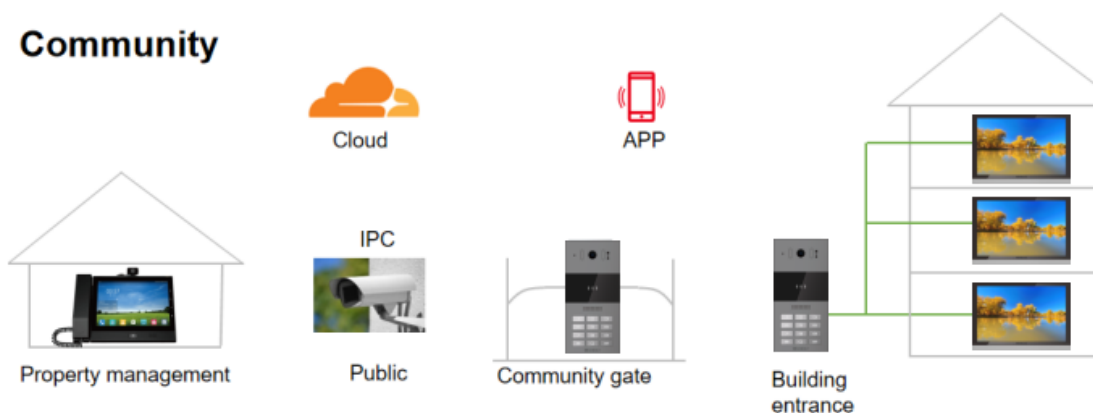

Specifications

Panel Type	Multi-apartment, Community, Hotel
Screen/Keyboard	12 Numeric keys+4 Function keys, Color backlight
Body	Aluminum
Colors	Gunmetal
Sensor	1/2.9-inch, CMOS
Camera	2 Mpx,Support infrared
Viewing Angle	120°(Horizontal) 60°(Vertical)
Output video	H.264 (Baseline,Main Profile)
Light Sensitivity	0.1Lux
Card Storage	1,0000
Power Consumption	PoE: 1.71~6.96W Adapter: 1.52~6.26W
Power Supply	DC12V / 1A PoE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Size of the Panel (LWH)	177.4x88x36.15mm
IP / IK Level	IP66 / IK07
Installation	Wall-mounted Flush-mounted(Need to Purchase Accessories Separately: EX102)

Functional Capabilities

SupportedProtocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	IC/ID Card, By DTMF Code, Remote door opening
Interface	Wiegand Input/Output Short Circuit Input/Output RS485 (Reserve) Line out for induction loop
Supported Wiegand	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	Mifare Classic 1K/4K, Mifare DESFire, Mifare Ultralight, Mifare Plus Cards 13.56 MHz, Cards 125 kHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay, Open API, Motion detection, Tamper Alarm, TF Card