




For rapid toll processing


Rapid, reliable, and economical processing of road users is essential when collecting toll charges at bridges, tunnels and on roads. Toll barriers from Magnetic have been specially designed for this situation. The innovative MHTM™ drive at the heart of the barriers is characterised by its speed, lack of maintenance and energy efficiency, and thus keeps long-term costs down. The Toll barriers can be adapted to meet individual requirements: there are four models with opening times of from

1.3–0.3 s, which can be equipped with a variety of control devices, flanges and barrier booms. All barrier boom types can be provided with swing-away flange. In the case of a collision with a vehicle, the barrier boom is released and can be manually re-engaged afterwards. This protects the barrier boom and the drive unit. There is also the optional auto-swing-away flange for the soft boom, which automatically re-engages after a collision with a vehicle.

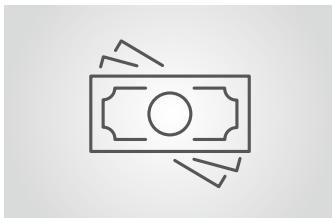


Effective toll processing

Toll barriers from Magnetic are the optimum solution for all toll applications thanks to their speed, reliability and low operating costs.

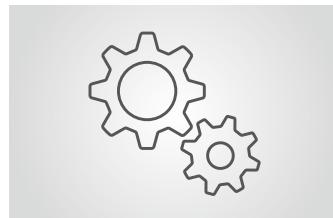

Innovative drive technology

The MHTM™ drive unit operates without maintenance, energy-efficiently and quietly. Its high torque ensures best possible operation even under extreme weather conditions.

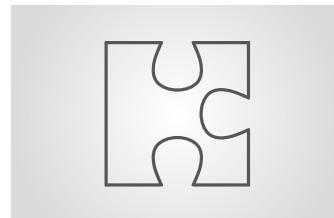

Individual configuration

Four models, three control units, three different barrier booms – the Toll barriers can be individually adapted to your requirements. Our staff would be pleased to advise you!



Easy access to components

Two simple hand movements suffice: easy access to the control system and drive unit by removing the hood and front panel. This increases user-friendliness and speeds up commissioning and servicing.

Toll

Toll barrier

- › Opening and closing times down to 0.3 s
- › Very low operating costs thanks to efficient and long-lived MHTM™ drive
- › Ease-of-use and optimum accessibility thanks to well thought-out design
- › Prizewinning design: German Design Award 2014 and red dot design award 2012
- › Designed for 10 million opening and closing cycles



Technical Data	Toll	Toll Pro	Toll HighSpeed	Toll HighSpeed 2
Lane width	Max. 3.0 m	Max. 3.0 m	Max. 3.0 m	Max. 3.2 m (with 2 barriers)
Opening/closing time	1.3 s	0.9 s	0.6 s	0.3 s
Power consumption	Max. 55 W	Max. 95 W	Max. 320 W	Max. 450 W
Drive technology	MHTM™	MHTM™	MHTM™	MHTM™
Voltage	100–240 V AC, 50–60 Hz			
Duty cycle	100 %	100 %	100 %	100 %
Housing dimensions (W x D x H)	315 x 360 x 1115 mm			
Enclosure rating	IP54	IP54	IP54	IP54
Temperature range	–30 to +55 °C			
Weight	Approx. 42 kg	Approx. 42 kg	Approx. 44 kg	Approx. 44 kg


Features	Toll	Toll Pro	Toll HighSpeed	Toll HighSpeed 2
Standard colour	RAL 2000	RAL 2000	RAL 2000	RAL 2000
Barrier boom	3 models available	3 models available	3 models available	2 models available
Control system	3 models available	3 models available	2 models available	2 models available
Number of digital inputs	8	8	8	8
Input with test for safety light barrier/laser scanner	1	1	1	1
Number of relay/digital outputs	6/4	6/4	6/4	6/4
Closing speed	Adjustable	Adjustable	Adjustable	Adjustable

Control systems	MGC without loop detector	MGC with loop detector	MGC Pro
2 detector channels		✓	✓
Adjustable inputs/outputs			✓
3 opening speeds			✓


Options	Toll	Toll Pro	Toll HighSpeed	Toll HighSpeed2
Special colours	✓	✓	✓	✓
Round boom (MicroBoom-T)	Up to 3.0 m	Up to 3.0 m	Up to 3.0 m	Up to 1.5 m
Octagonal boom (MicroBoom-S)	Up to 3.0 m	Up to 2.5 m	Up to 2.5 m	
Soft boom (MicroBoom-AT)	Up to 3.0 m	Up to 3.0 m	Up to 3.0 m	Up to 1.5 m
Swing-away flange	All booms	All booms	All booms	All booms
Auto-swing-away flange	Only soft boom	Only soft boom	Only soft boom	Only soft boom
Boom drop contact	✓	✓	✓	✓
Hood light	✓	✓	✓	✓
Key-operated switch	✓	✓	✓	✓
Radio module	✓	✓	✓	✓
Ethernet module	✓	✓	✓	✓
RS485 module	✓	✓	✓	✓
CAN module (counting)	✓	✓	✓	✓
Second detector module	✓	✓	✓	✓
GSM module	✓	✓	✓	✓
Safety light barrier/laser scanner	✓	✓	✓	✓
Battery backup	✓	✓		

Dimensional drawings

Toll with round boom (MicroBoom-T)

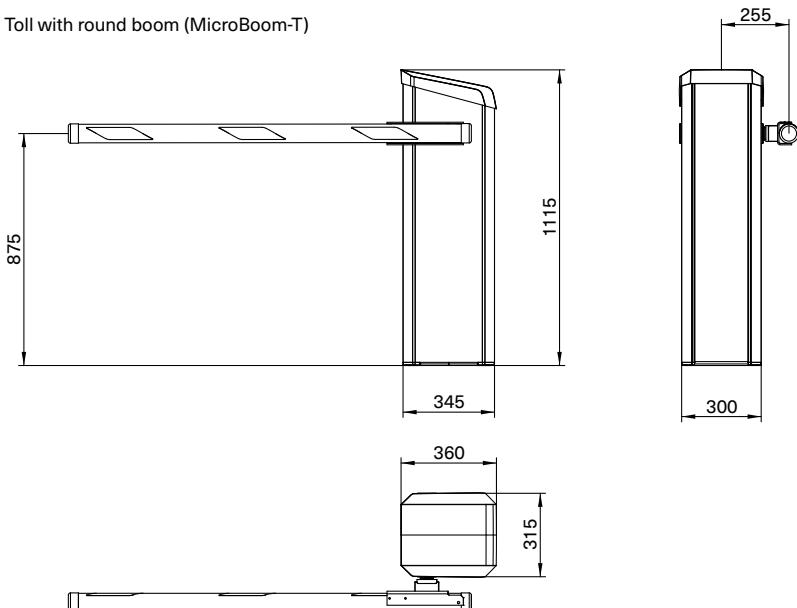

Toll with soft boom (MicroBoom-AT)

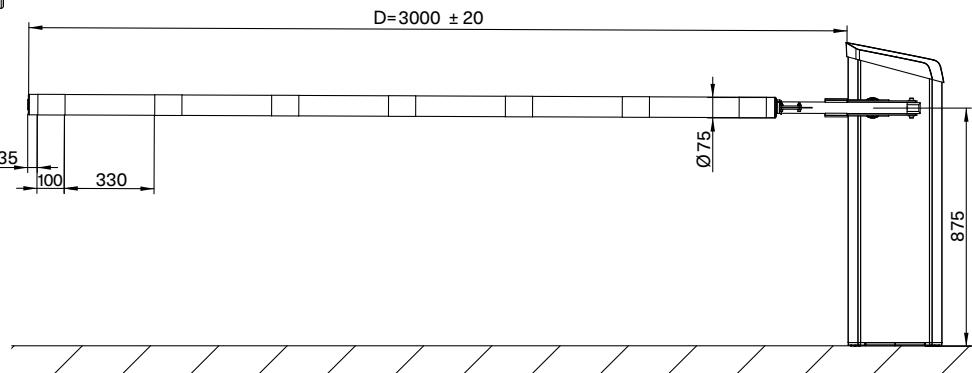

Access to Progress

Magnetic stands for pioneering products – in every way. Our access control systems for vehicles or pedestrians clear the way for thousands of people every day – at car parks, toll gates, stations, airports and in buildings. Our technology is also pioneering, however: with innovative drives, intelligent control systems and well thought-out details it provides maximum safety and longevity. Are you also on the path to Magnetic?



Vehicle barriers

Access barriers
Parking barriers
Toll barriers
Special barriers

Pedestrian gates

Turnstiles
Swing gates
Tripod gates
Retractable gates
Wing gates

Terminals

Cars
Trucks

Germany

MAGNETIC AUTOCONTROL GMBH
Grienmatt 20
79650 Schopfheim
Phone +49 7622 695-5
Fax +49 7622 695-800
E-mail info@magnetic-germany.com

Brazil

MAGNETIC AUTOCONTROL LTDA
Rua Toledo Barbosa, 491
03061-000 Belenzinho
São Paulo - SP
Phone +55 11 5660 8500
E-mail info@magnetic-br.com

Ireland

NATIONAL AUTOMATION LTD
Boyle Business Park,
Boyle, Co. Roscommon
F52 V590
Phone +353 71 9663893
E-mail sales@nal.ie

Scandinavia

FAAC NORDIC AB
Box 125
284 22 Perstorp
Sweden
Phone +46 435 77 95 03
E-mail info@magnetic-nordic.com

Australia

MAGNETIC AUTOMATION PTY LTD
38 Metrolink Circuit
Campbellfield, VIC 3061
Phone +61 3 9339 2900
E-mail info@magnetic-oz.com

China

MAGNETIC CONTROL SYSTEMS CO., LTD
No. 3 Building, No. 51
Lane 1159, Kang Qiao (East) Road
Kang Qiao Industrial Zone, Shanghai
Phone +86 21 68182970
E-mail info@magnetic-cn.com

Italy

FAAC S.P.A. SOC. UNIPERSONALE
Via Calari, 10
40069 Zola Predosa (BO)
Phone +39 05161724
Email controlloaccessi@faactechnologies.com

Southeast Asia

MAGNETIC CONTROL SYSTEMS SDN. BHD
No. 17, Jalan Anggerik Mokara 31/54
Taman Perindustrian Kota Kemuning
40460 Shah Alam
Selangor Darul Ehsan
Malaysia
Phone +60 3 5123 0033
E-mail info@magnetic-malaysia.com

Austria

FAAC GMBH
Münchner Bundesstraße 123
5020 Salzburg
Phone +43 662 853395-0
E-mail at.info@faacgroup.com

France

FAAC FRANCE
15 Avenue Maréchal Juin
69720 St Laurant de Mure
Phone +33 4 72 21 86 89
serviceClientMagnetic@faactechnologies.com

Middle East

FAAC MIDDLE EAST FZE
Dubai Silicon Oasis
PO Box 54886
Dubai
United Arab Emirates
Phone +971 4 3724193
E-mail info@magnetic-uae.com

Spain

CLEM, S.A.U.
Avda. de la Fuente Nueva, nº 12 –
Nave 8-18
28703 San Sebastián de los Reyes
Madrid
Phone: +34 91 358 11 10
E-mail: info@clemsa.es

Benelux countries

FAAC BENELUX NV/SA
Industriezone 3B
8490 Jabbeke
Belgium
Phone +32 50 320202
E-mail info@magnetic-benelux.com

India

MAGNETIC FAAC INDIA PVT LTD.
PRS Centre
Plot No. 373 to 376, 2nd Floor (West Wing)
1st Cross Street, Nehru Nagar
Old Mahabalipuram Road
Kottivakkam (Opp Rayala Technopark,
Perungudi)
Chennai 600041
Phone +91 44 421 23297
E-mail info@magnetic-india.com

N. and S. America (excl. Brazil)

FAAC INTERNATIONAL, INC
3160 Murell Road
Rockledge, FL 32955
USA
Phone +1 321 635 8585
E-mail info@magnetic-usa.com

United Kingdom

FAAC (UK) LIMITED
Unit 10 The Hatch Industrial Park,
Greywell Road,
Mapledurwell, Basingstoke, Hampshire,
RG24 7NG
Phone 01256 318100
E-mail sales@faac.co.uk