

AI-CCTV

PRO1 DOME CCTV™




Product Code: FC-F3DP15


OPTIMISED FOR ALL ENVIRONMENTS

- One lens fits all heights, caters for different types of stores with varying ceiling heights, as low as 2.1m to 6.0m.
- Advanced Wide Dynamic Range (WDR) technology ensures clear capture of scenes with strong contrasts between light and dark areas.
- Water Leakage-Proof. Enclosed in splash-proof casing to reduce the counter failure rate due to common issues like water leakage on the ceiling.
- Easy to install and set up. User-friendly design enables quick and hassle-free installation.
- 1-year Manufacturer Warranty.

PRODUCT DIMENSION

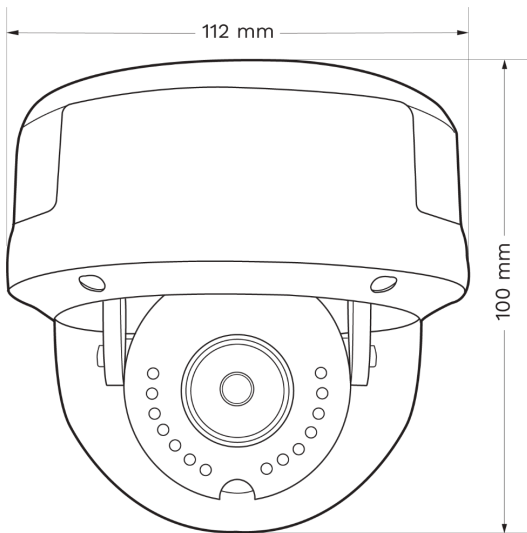

FRONT VIEW

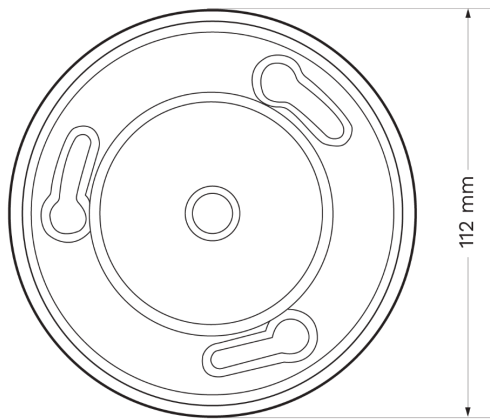

TOP VIEW

TECHNICAL DATA

Device Dimension (mm)	112 (W) x 112 (D) x 100 (H)
Packing Dimension (mm)	120 (W) x 120 (D) x 105 (H)
Weight	Device: 0.3 kg Packing: 0.48 kg
Camera	6MP 1/2.8" CMOS Sensor with 100° lens (100° Coverage)
Frame Rate	25 fps
Casing	Explosion-proof plastic case with glass lens-covering.
IP Rating	IP66
Ideal Mounting Height	2.1 metres – 6.0 metres
Operating Environment	Temperature 10°C to 65°C, Humidity 10% to 90%, Comprehensive lightning protection
Storage Environment	Temperature -40°C to 70°C, Humidity 10% to 95%
Tracking Technology	FFC VeyonTrack
Field Upgradable	Manual / Auto Software upgrade
Image Output	2880x1616 / 2560x1440 / 2304x1296 / 1920 x1080/ 800x448
Night Mode	Auto Switch IR Light
IR Wavelength	850nm
Video Compression	H.265+, H.265, H.264
Power	PoE Power supply (IEEE802.3af)
Voltage	48~56 VDC
Power Consumption	3W
Cabling	Cat5e/Cat6, 100Mbps RJ45
Origin	Designed in the UK, Assembled in Malaysia.

FIRMWARE SPECIFICATION FOR DEVICE LEVEL

Interface	HTTPS, HTTP, RTSP, RTMP, NTP, DHCP, DNS, DDNS
User Levels	2 levels: Administrator, Standard Users
Operating System	Footfall Counter OS
Ethernet	10/100 Mb Ethernet
Data Delivery	TCP/IP