

### Description

The JSL-63-B3 is a SIP door phone designed for multi-destination calling at building entrances.

It features three physical quick call buttons, allowing visitors to contact different departments or users directly, such as reception, security, or property management.

With a built-in 2MP camera, multiple unlock methods, and a rugged IP65-rated housing, it combines access control, intercom, and video security in one device.

Supporting SIP and ONVIF, the JSL-63-B3 integrates easily with IP intercom systems, SIP servers, and VMS platforms.



### Main Feature



3 quick call buttons with customlabel



Equipped with a 2megapixel HDR high-definition camera, it provides clearer imaging




IP65 high protection rating, wide temperature operation, suitable for harsh outdoor environments



Equipped with a wide range of interfaces for connecting various security devices



Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility

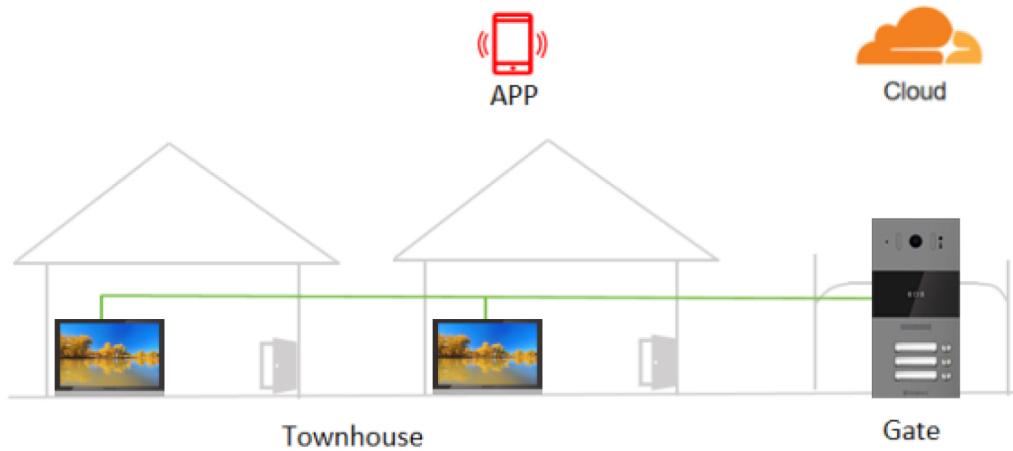


### Specifications

<b>Panel Type</b>	Townhouse, Office, Small apartment
<b>Screen/Keyboard</b>	Quick call button×3
<b>Body</b>	Aluminum
<b>Colors</b>	Gunmetal
<b>Sensor</b>	1/2.9-inch, CMOS
<b>Camera</b>	2 Mpx, Support infrared
<b>Viewing Angle</b>	120°(Horizontal) 60°(Vertical)
<b>Output Video</b>	H.264 (Baseline, Main Profile)
<b>Light Sensitivity</b>	0.1Lux
<b>Card Storage</b>	10,000
<b>Power Consumption</b>	PoE: 1.70~6.94W Adapter: 1.50~6.02W
<b>Power Supply</b>	DC12V / 1A POE 802.3af Class 3
<b>Working Temperature</b>	-40°C~+70°C
<b>Storage Temperature</b>	-40°C~+70°C
<b>Size of the Panel (LWH)</b>	177.4x88x36.15mm
<b>IP Level</b>	IP65
<b>Installation</b>	Wall-mounted Flush-mounted(Need to purchase accessories separately: EX102)

### Functional Capabilities

<b>Supported Protocols</b>	SIP 2.0 over UDP/TCP/TLS
<b>Lock Opening</b>	IC/ID Card, By DTMF Code, Remote door opening
<b>Interface</b>	Wiegand Input/Output Short Circuit Input/Output RS485 (Reserve) Line out for induction loop
<b>Supported Wiegand</b>	26, 34 bit
<b>Supported ONVIF Types</b>	Profile S
<b>Supported Standards</b>	Mifare Classic 1K/4K, Mifare DESFire, Mifare Ultralight, Mifare Plus Cards 13.56 MHz, Cards 125 kHz
<b>Talking Mode</b>	Full duplex (High-definition Audio)
<b>Additionally</b>	Built-in relay, Open API, Motion detection, Tamper alarm, TF Card

### Appearance and Interfaces

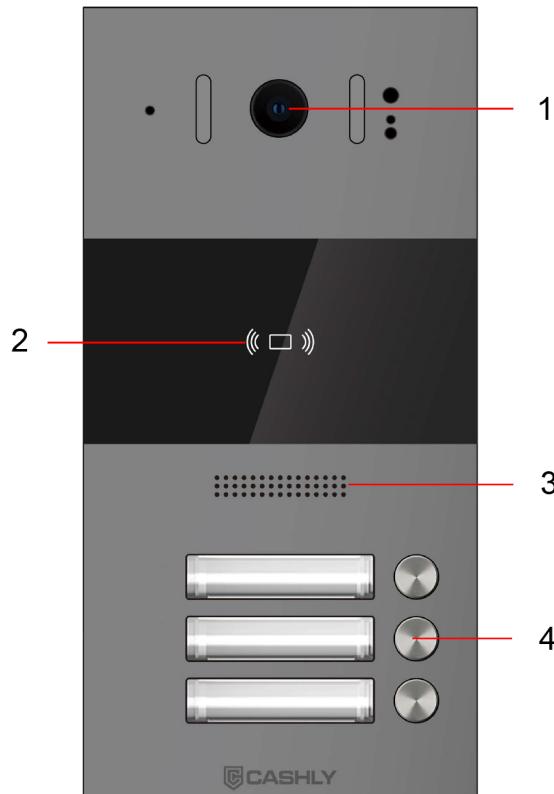

No.	Description
1	Camera
2	Card Reading Area
3	Speaker
4	Three Buttons

### Dimension

