

Description


The JSL-I64 is a IP door phone combining access control, intercom, and security in a durable IP65-rated design. It features a 2MP camera, supports multiple unlocking methods, and enables one-touch audio/video calls. Compatible with ONVIF, it integrates easily with major security platforms—ideal for upscale residences, offices, communities, and industrial parks.



Main Feature

-  Brand new digital keypad design with color backlight for an enhanced user experience
-  Equipped with a 2mega-pixel HDR high-definition camera, it provides clearer imaging.
-  IP65 high protection rating, wide temperature operation, suitable for harsh outdoor environments.
-  Equipped with a wide range of interfaces for connecting various security devices.
-  Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility.


Community

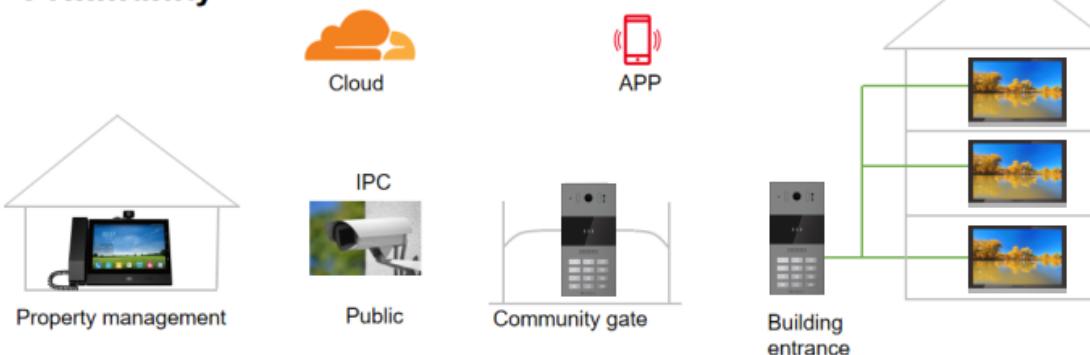

Specifications

Panel Type	Aluminum alloy panel
Screen/Keyboard	12 Numeric keys
Sensor	1/2.9-inch, CMOS
Camera	2 Mpx, Support infrared
Viewing Angle	120°(Horizontal) 60°(Vertical)
Output video	H.264 (Baseline, Main Profile) / H.265
Audio	G.711
Light Sensitivity	0.1Lux
Card Storage	1,0000
Power Consumption	PoE: 1.71~6.96W Adapter: 1.52~6.26W
Power Supply	DC12V / 1A PoE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Size of the Panel (LWH)	177.4x88x36.15mm
IP Level	IP65
Installation	Wall-mounted Flush-mounted(Need to Purchase Accessories Separately: EX102)

Appearance and Interfaces

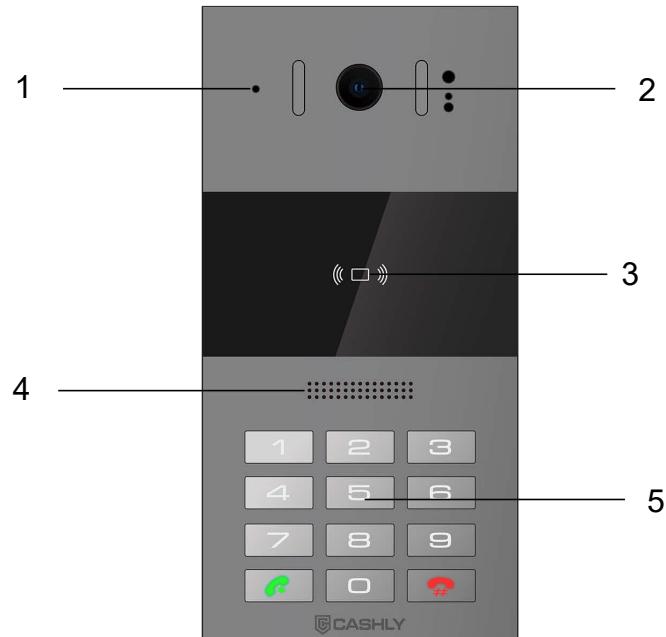

No.	Description
1	Microphone
2	Camera
3	Card Reading Area
4	Speaker
5	Numeric Keyboard

Dimension

