Product Features

- Wireless connectivity through BLE (Bluetooth Low Energy)
- IP55 rated, FCC, CE, and IC certified
- Slim 0.33" (8.5mm) profile
- All metal housing
- Visual and audible indicators
- Advanced auto unlock
- ADA compliant
- Non-handed
- With or without pull handle

Functionality

- Dual functionality - shared or assigned use
- Manage with the DigiLink® cloud based network application
- Operate by User Code or mobile credential

Installation

- Designed for both new or retrofit installations
- Adaptable to multiple door thicknesses
- 1/2" (12.7mm) motorized deadbolt locking mechanism
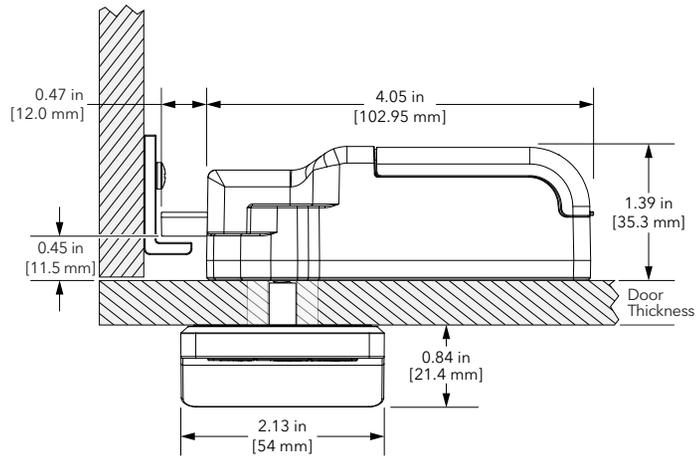- Snap-lock cable connector (patented)

Power

- Powered by 4 premium AA batteries
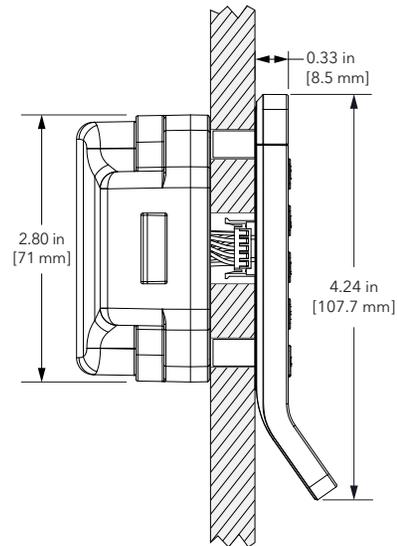- For expected battery life, refer to Battery Life Estimate Chart

Support

- On-site product updates
- Lifetime Support
- 2-year warranty

Finish Options

Brushed Nickel

Matte Black

Standard Body with Pull | Deadbolt with Cable Connection

TOP VIEW

0.47 in [12.0 mm]
4.05 in [102.95 mm]
1.39 in [35.3 mm]
0.45 in [11.5 mm]
Door Thickness
0.84 in [21.4 mm]
2.13 in [54 mm]

SIDE VIEW

0.33 in [8.5 mm]
2.80 in [71 mm]
4.24 in [107.7 mm]

FRONT VIEW

2.13in [54.2mm]
4.24in [107.7mm]

1	2abc	3def
4ghi	5jkl	8mno
7pqrs	8tuv	9wxyz
C	0	o⌐
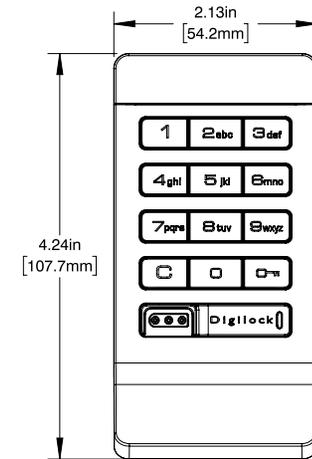
Digilock

Standard Body without Pull | Deadbolt with Cable Connection

TOP VIEW

0.47 in [12.0 mm]
4.05 in [102.95 mm]
1.39 in [35.3 mm]
0.45 in [11.5 mm]
Door Thickness
2.13 in [54 mm]
0.33 in [8.5 mm]

SIDE VIEW

0.33 in [8.5 mm]
2.80 in [71 mm]
3.23 in [82 mm]

FRONT VIEW

2.13in [54.2mm]
3.23in [82mm]

1	2abc	3def
4ghi	5jkl	8mno
7pqrs	8tuv	9wxyz
C	0	o⌐
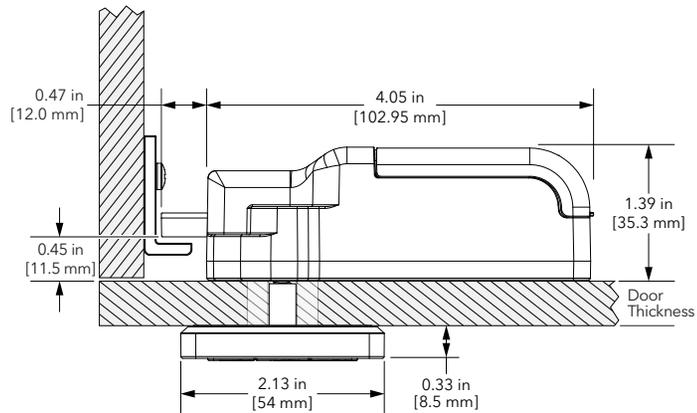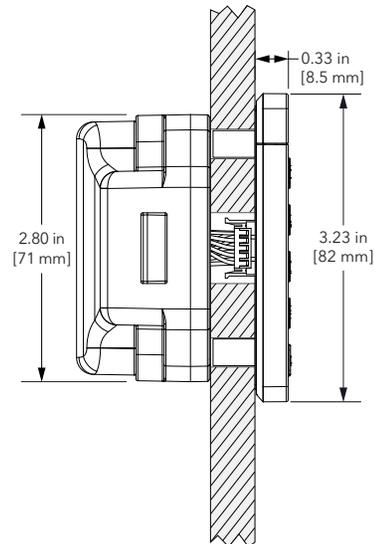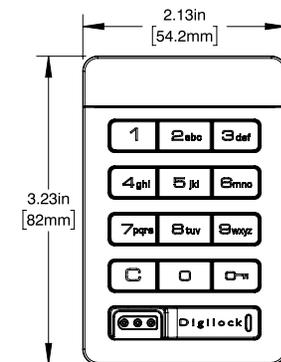
Digilock

Digilock®

CONTACT INFORMATION

DIGILOCK AMERICAS

Sales
Email: sales@digilock.com
Phone: +1 800 989 0201

Support
Email: support@digilock.com
Toll Free: +1 866 712 7071

DIGILOCK EUROPE BV

Sales
Email: sales@digilock.eu
Phone: +31 0 20 303 3060

Support
Email: support@digilock.eu
Toll Free: +1 866 696 0979

DIGILOCK ASIA

Sales
Email: sales@digilock.asia
Phone: +852 2776 0800

Support
Email: support@digilock.asia
Toll Free: +1 866 699 9180