Product Features

- Wired for power and data transfer
- FCC, CE, and IC certified
- Metal frame
- Robust locking mechanism
- External LED indicator for lock use status
- Interior LED to illuminate storage area
- Internal USB-A port for charging devices
- ADA compliant
- Bi-directional handing
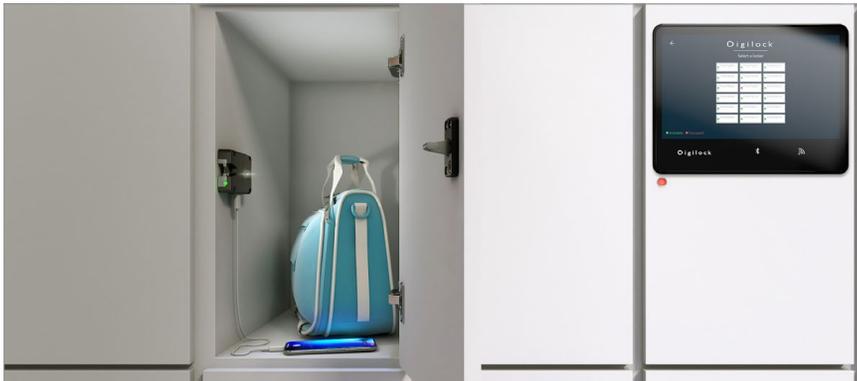- Self-adjusting hook latch

Functionality

- 13.56 MHz RFID Standards (ISO 14443A - ISO 14443B - ISO 15693) RFID Compatibility Statement
- Multi-functional – Shared Use, Assigned Use, Parcel Pickup, and Reservations
- Manage with the DigiLink cloud-based network application
- Operate by RFID credential, Mobile ID, or User Code via Pivot Kiosk
- Pivot Kiosk readers with HID Omnikey Secure Element support the power of HID employee badge and Student ID in Apple Wallet.
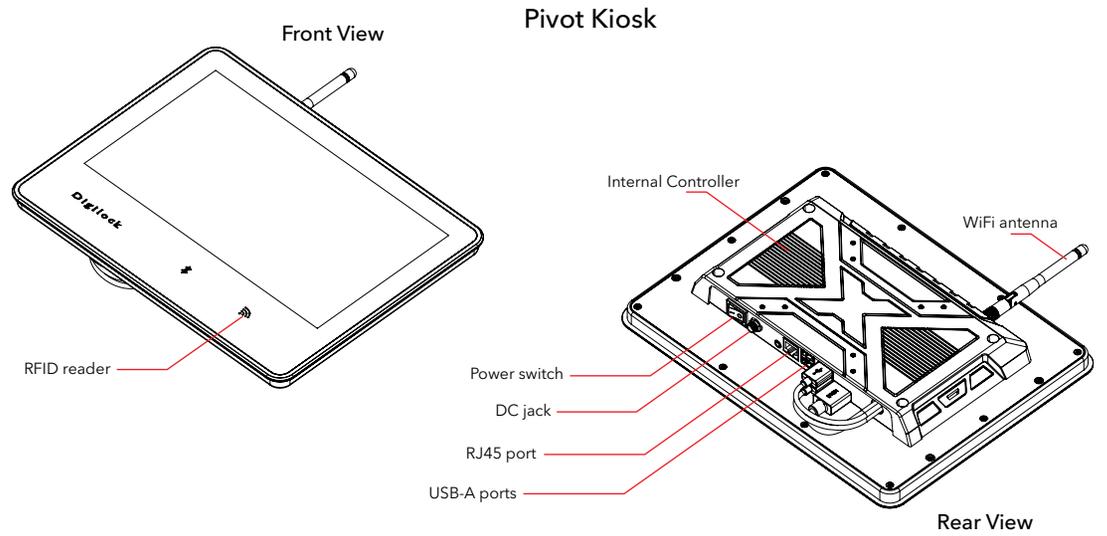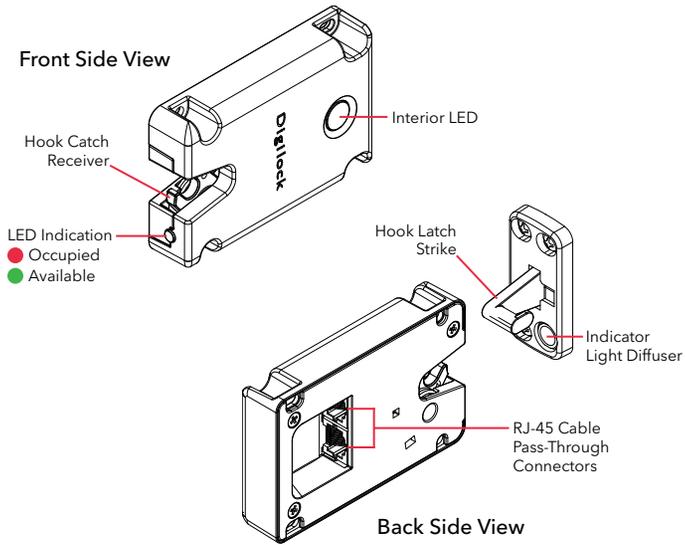
Installation

- Designed for new installations, installing seamlessly in the interior of the storage unit
- Suitable for all door materials
- Power and data wired on the same cable with an RJ45 connector
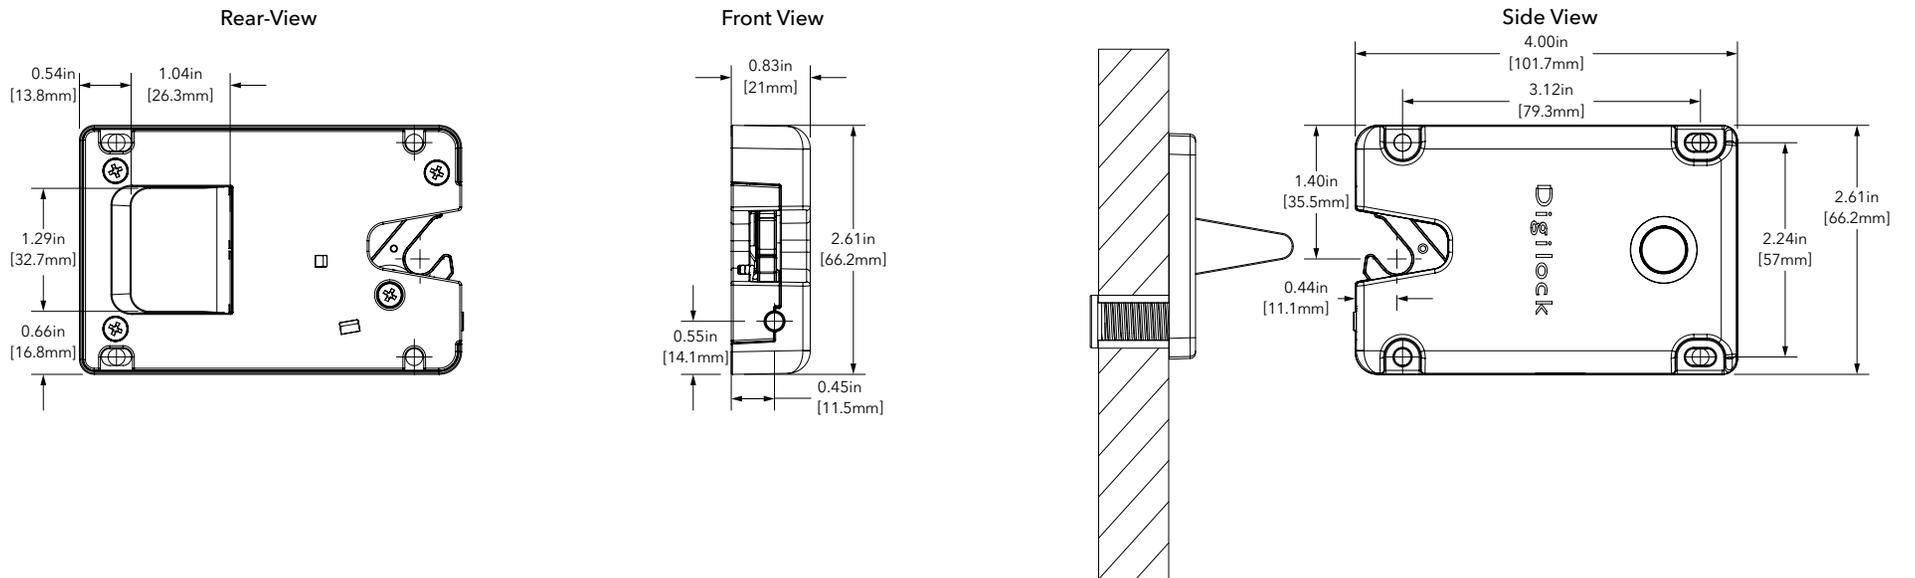
Support

- Onsite product updates
- Lifetime support
- 2-year warranty

Lock Overview

Front Side View

- Interior LED
- Hook Catch Receiver
- LED Indication
  - 🔴 Occupied
  - 🟢 Available
- Hook Latch Strike
- Indicator Light Diffuser
- RJ-45 Cable Pass-Through Connectors

Back Side View

Pivot Kiosk

Front View

- RFID reader

Rear View

- Internal Controller
- WiFi antenna
- Power switch
- DC jack
- RJ45 port
- USB-A ports

Overall Dimensions

Rear-View

- 0.54in [13.8mm]
- 1.04in [26.3mm]
- 1.29in [32.7mm]
- 0.66in [16.8mm]

Front View

- 0.83in [21mm]
- 2.61in [66.2mm]
- 0.55in [14.1mm]
- 0.45in [11.5mm]

Side View

- 4.00in [101.7mm]
- 3.12in [79.3mm]
- 1.40in [35.5mm]
- 0.44in [11.1mm]
- 2.61in [66.2mm]
- 2.24in [57mm]

Digilock®

CONTACT INFORMATION

Scan the QR code for support or visit:
digilock.com/contact/support