


ECLIPSE

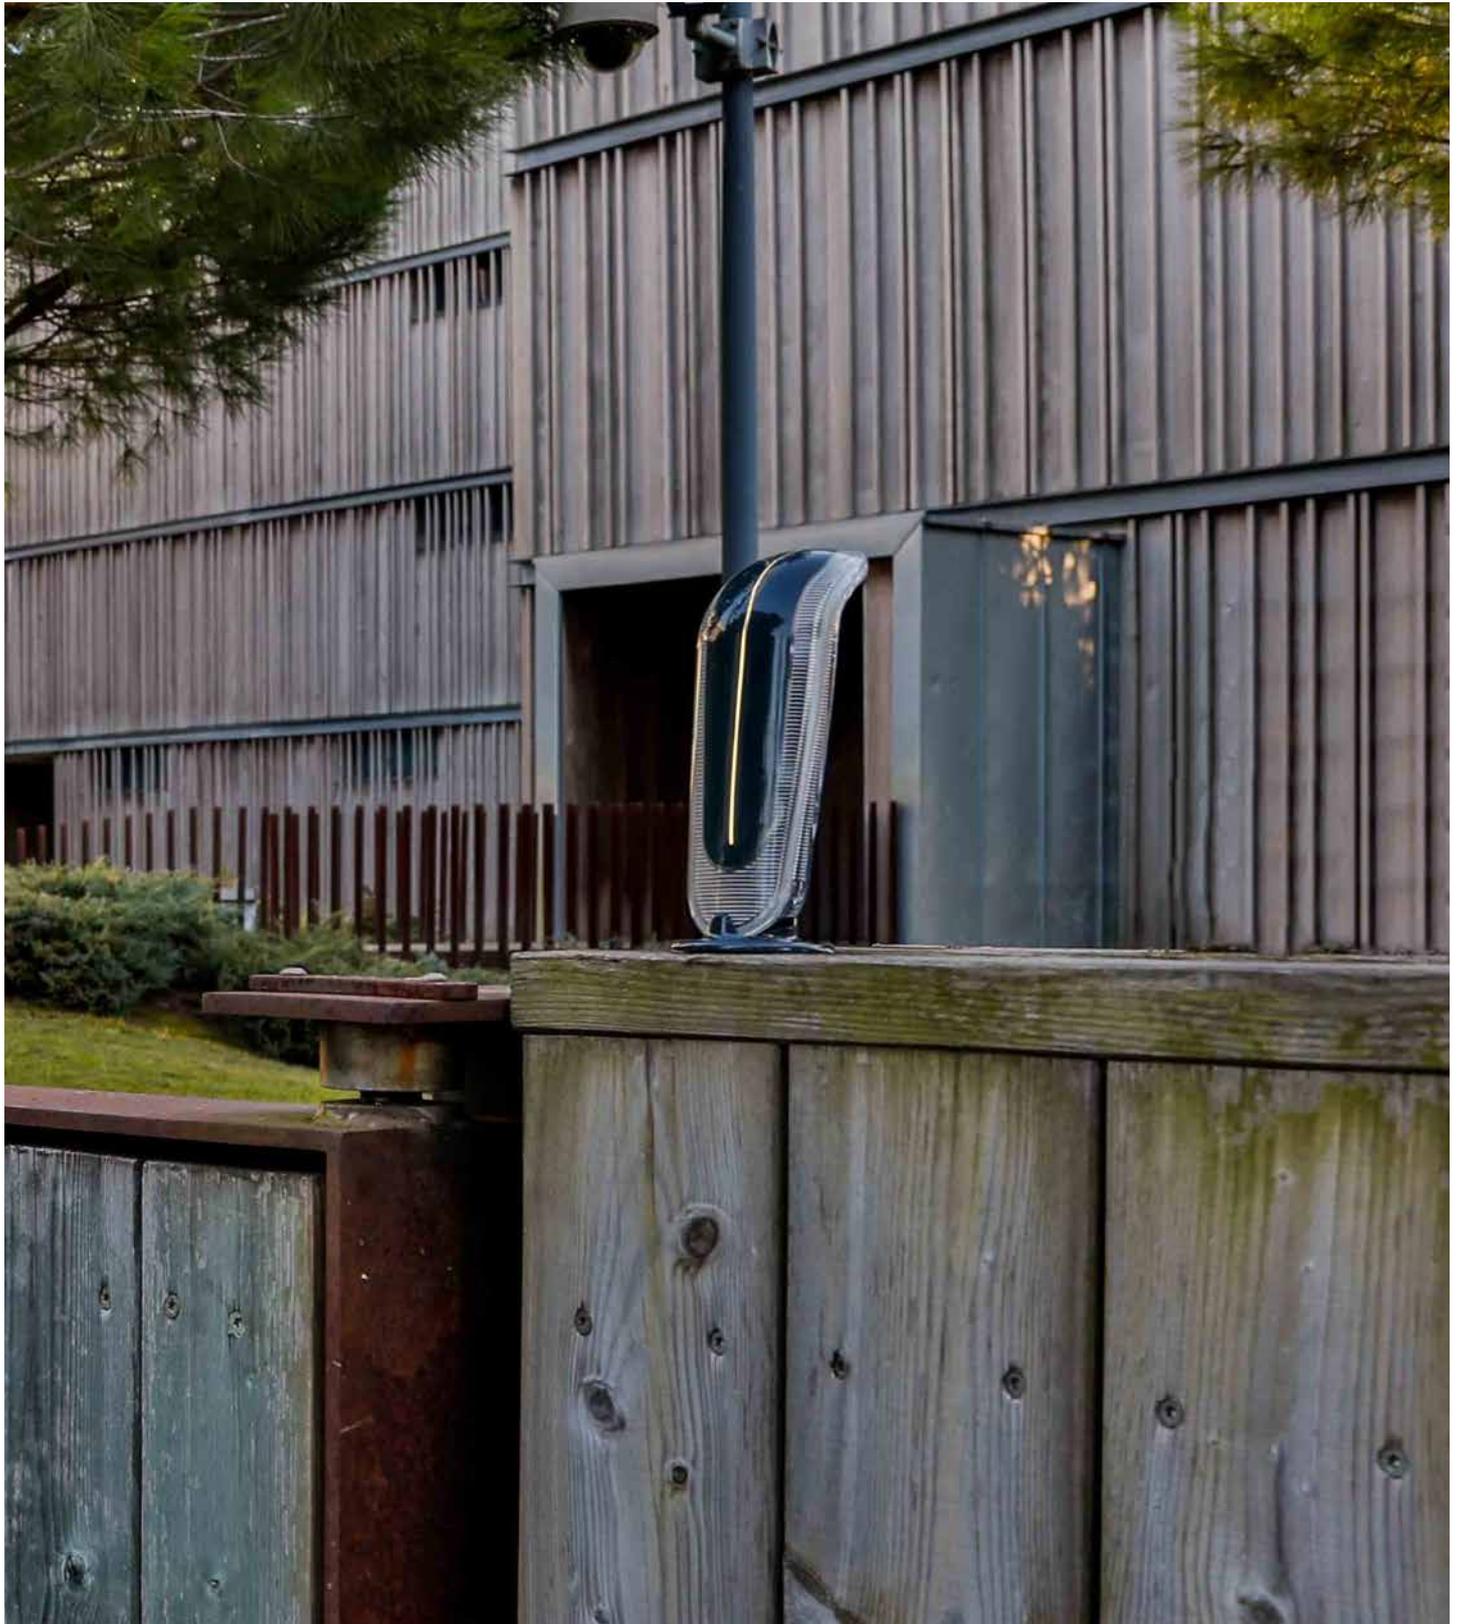

**FULL LED FLASHING AND
COURTESY LIGHT**

KEY
AUTOMATION

ECLIPSE




increase in the protection rating against humidity and atmospheric agents

Courtesy light is automatically activated independently from the automation (with 14A control board)

Flashing light with blinking amber color LED light

Courtesy light: fixed white led light commanded by an internal crepuscular sensor.

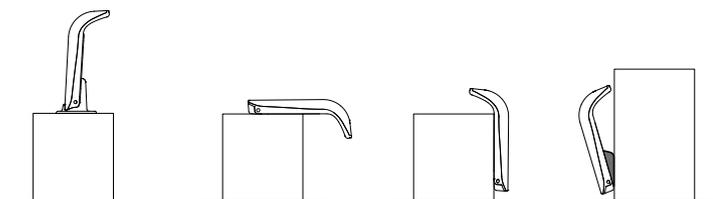

Multiple positioning both horizontally and vertically.

MODELS

CODE	DESCRIPTION
ECLIPSE	Led flashing and courtesy light with crepuscular sensor and built-in antenna

TECHNICAL DATA

MECHANICAL DATA

maximum cycle operation (led flashing)	%	50/100
maximum cycle operation (courtesy light)	%	100

ELECTRICAL DATA

power led flashing/courtesy light	Vdc	24-35
	Vac	20-24
absorbed courtesy light	W	2
absorbed led flashing	W	3
antenna frequency	MHz	433,92

GENERIC DATA

protection degree	IP	54
colour (led flashing)	-	amber
colour (courtesy light)	-	white
dimensions (L - D - H)	mm	75 - 98 - 190
operating temperature	°C	-20 + 55