

Double-side window facing display

Outstanding Visibility High Brightness

The 531XH has a brightness of up to 3000 nits, making it a better display than other products.
Super high brightness display is your store's first choice.

Industrial Standard LCD Display

With double sided, people can't miss any information from the device no matter which side they are watching. Most high effective advertising purpose for your store.

Double Sided Floor- stand Window Facing Display

With double sided, people can't miss any information from the device no matter which side they are watching. Most high effective advertising purpose for your store.

Space Efficiency Slim Design

Super thin depth, our 531XH series just get 57 mm which leads to space efficiency in an in-window environment.

Industrial Grade

Designed for use in any applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Network CMS Upgrade

We also offer cloud basis network CMS if required,and you can run the third party Digital Signage software viaour Android PC board too.

Automatic Brightness Control

To let the passerby have a good visual experience no matter in daily time or evening, the display have a sensitive light sensor inside, brightness would be automatic control by the sunlight.

IPS panel


IPS panel, 178 wide viewing Angle
The picture is still sharp and undistorted

Sunlight Readable | 24/7Usage | Android Media Player | Plug and Play | Automatic Brightness Control | Fan-less design | Wheel

Product Advantages



Product Features

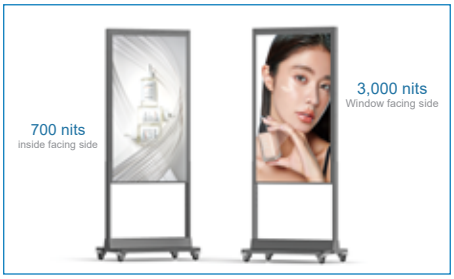


3000 cd/ m² High Brightness

Out standing visible high brightness



Auto Brightness Control

Brightness would be auto adjust via the ambient light

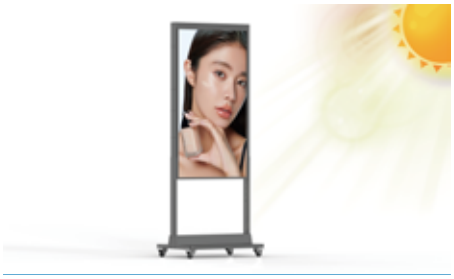

Industrial Standard LCD glass

Operates stably in direct sunlight without shielding. Ideal for sunny plazas, open streets, and high-temperature outdoor environments



Space Efficiency Slim Design

Ultra-thin depth, only 72 mm, resulting in improved space efficiency in the in-window environment.



Adjustable floor support

Compared to the traditional floor-standing bracket, we have upgraded to an adjustable bracket. Customers can adjust the height of the bracket according to their needs, which brings convenience to the installation.



IPS panel

IPS panel, 178 wide viewing Angle
The picture is still sharp and undistorted

Screenage

PEOPLE WHO PRODUCE RESULTS. THAT'S US!



FACTORY



EXHIBITION HALL



WAREHOUSE

COMPANY PROFILE

- Company Name: Screenage Technology
- Established in **2008**
- Focus area: Commercial LCD Display Product Development
- 10-Year Professional Manufacturer in Shenzhen,China
- Factory Total Area: **3000m2**
- Output: **100,000Pcs/Year**
- Product Range: Digital Signge, LCD Video Wall, Floor Standing Kiosk, Industrial LCD Monitor, All-in-one PC and LCD Interactive Whiteboard.
- Main Market: North America,Western Europe,Mid East,Eastern Europe, South America,Africa
- Certificate: **ISO9001,CE,EMC,RoHS**

Have questions?

We have answers!

Get answers about Pricing,Specifications,Installation,and more

CONTACT US NOW!

E-mail: info@screenage.com

Specifications

Model			No.531XH				
Panel A/B	Display Size(inch)		32"	43"	49"	55"	65"
	Resolution		1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
	Active Display Area(mm)		701.4(V) x395.9(H)	943.0(V) x531.0(H)	1077.8(V) x 608.0(H)	1211.6(V) x 682.6(H)	1428.5(V) x 803.5(H)
	Aspect Ratio		16:09	16:09	16:09	16:09	16:09
	Brightness(cd/m2)		3000/700 nit	3000/700 nit	3000/700 nit	3000/700 nit	3000/700 nit
	Contrast Ratio(Typ.)		1000:1	1000:1	1000:1	1000:1	1000:1
	Viewing Angle(H/V)		178/178				
	Colour		16.7M				
	Response Time(G-to-G)		6ms				
	Operation Hour		24/7				
Sound	Loud Speaker		5W, 8Ω				
Power	Type		Internal				
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz				
	Power Consumption	Max[W/h]	193	207	372	425	523
		Sleep mode	less than 0.5W				
		Off mode	less than 0.5W				
Mechanical Spec	Protection Glass		Yes				
	Stand Type		Floor-standing				
Environmental	Operating Environment Temperature		-10°C ~ 50°C(indoor)				
	Operating Humidity		10% ~ 80 %				
	Storage Humidity		5% ~ 95%				
OS	Two android boards inside	Processor	T972 (1.9GHz, octa core)				
		RAM	2G				
		Flash	16G EMMC				
		USB	USB2.0 HOST(X2)				
		HDMI	IN				
		LAN	10M/100M Ethernet(Network version screen only)				
		External memory	8GB SD card(up to 32G)				
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)				
		Media Resolution	3840*2160				
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)				
		Operating System	Android 9.0				
Certifi cation	Safety		CE ROHS				
Accessories	Included		Remote control, Key, Power cable,Ceilling hanging bracket				
	Quality assurance		1 year （2-3 years optional）				
	Type of packaging		Carton box /honeycomb box + wooden case				