No.621S

Outdoor Wall-mounted Display

Sunlight Readable

Brightness is paramount when using outdoor screens these displays use commercial grade Ultra High Brightness panels (2,000 cd/m2) ,more than 5 times brighter than a standard home TV to allow easy readability in direct sunlight. The display also has an ambient liht sensor that will aer the screens brightness based on the displays surrounding light levels.This leave sthe screen with the best clarity while also conserving energy.

Outdoor Enclosure

Designed with obust, corrosion protected, casing to protect against the elements and the public. with an IP66 rating it keeps out all airborne particles as weel as being protected from any wet weather condtions and also feature waterproof over molded AV comnectors. The enclosures are made from mild steel and have thermally toughened glass.

Optical Binding Processing

Between the tempered glass and the LCD screen, there is no gap for the air flow, we are using LOCA optical bonding process attach them together.
So you would have an impressive watching experience that you never had in that outdoor LCD display.

Auto brightness control

Integrated high sensitive sunlight sensor inside, it would change the brightness of the panel automatically.

Industrial Grade

Designed for use in any applications this screen can run 24/7.There are no external buttons or controls to avoid tampering.

Network CMS Upgrade

We also offer cloud basis network CMS if required,and you can run the third party Digital Signage software viaour Android Pc board too.

Sturdy Enclosure

Made from mild steel,the enclosure is strong enough to protect the displays components from outside harm such as vandals.

Weather proof

An IP66 Rating means the display is able to withstand all weather conditions, wet and dry and also features waterproof over molded HDMI connectors.


Sunlight Readable


24/7Usage


Touch Screen Upgrade


Android Media Player


Vandal Proof


Integrated Temperature Control


Water Proof


Steel Enclosure

Product Advantages

Outdoor advertising player digital signage Waterproof & Lightning protection LCD Outdoor Wall-mounted Display




Product Features



Optial Binding Processing

We use the LOCA optical bonding process to connect the tempered glass to the LCD screen. So you'll have an impressive viewing experience.

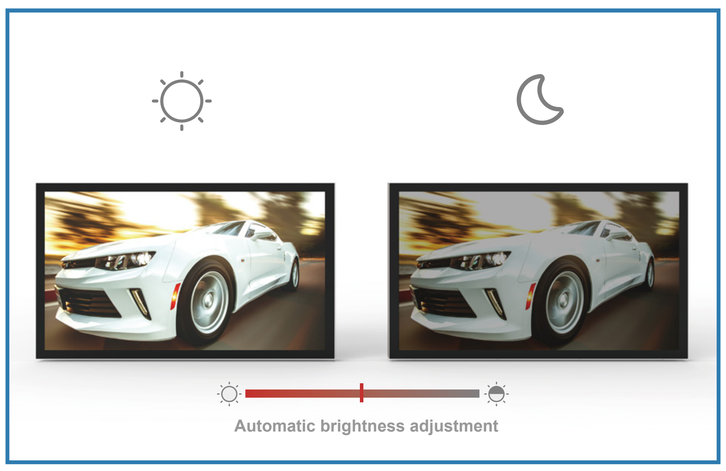


Automatic brightness control

Up to 2,500 nits, it can read clearly even in strong sunlight, and the brightness is automatically adjusted by the lights.




Excellent heat dissipation

Aluminum radiator can output the heat of the whole machine to the outside world at the fastest speed.

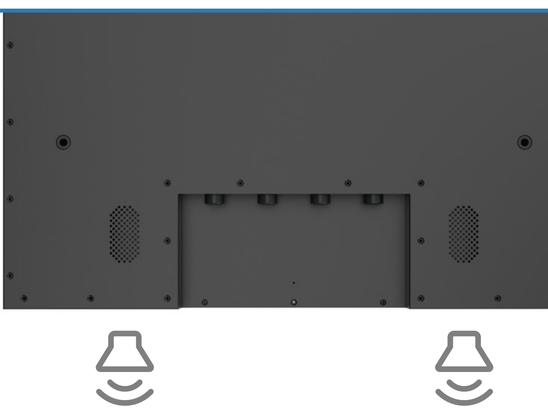

10 Watt loudspeaker

Two 8 ohm 10 watt outdoor use loudspeaker on the side, ensure passengers could hear what you want they hear.

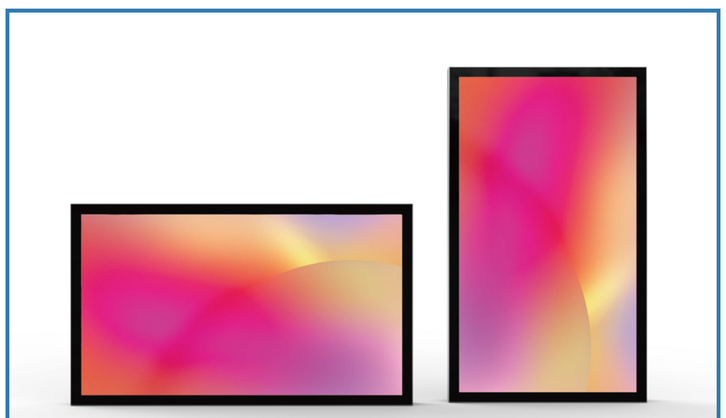

VESA standard

Support both landscape and portrait



High operating temperature

With industrial standard LCD display, ou-ropen frame would works until 80 degree ofenvironment temperature.

Specifications

	Model		No.621S					
Panel	Display Size(inch)		32"	49"	55"	65"	75"	86"
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)		699.0(H) x393.0(V)	1074.0(H) x 604.0(V)	1210.0(H) x 681.0(V)	1429.0(H) x 804.0(V)	1651.0(H) x 929.0(V)	1938.0(H) x 1098.0(V)
	Aspect Ratio		16:09	16:09	16:09	16:09	16:09	16:09
	Brightness(cd/m2)		2500nit	2500nit	2500nit	2500nit	2500nit	2500nit
	Contrast Ratio(Typ.)		1000:1	1000:1	5000:1	5000:1	5000:1	5000:1
	Viewing Angle(H/V)		178/178					
	Color		16.7M					
	Response Time(G-to-G)		6ms					
	Operation Hour		24/7					
Sound	Loud Speaker		5W, 8Ω (2 sets)					
Power	Type		Internal					
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz					
	Power Consumption	Max[W/h]	100	120	150	260	280	360
		Sleep mode	less than 0.5W					
		Off mode	less than 0.5W					
Mechanical Spec	Protection Glass		Yes					
	Stand Type		Wall-mounted					
Environmental	Operating Temperature		-40°C ~ 78°C					
	Storage Temperature		-30°C ~ 55°C					
	Operating Humidity		10% ~ 80 %					
	Storage Humidity		5% ~ 95%					
	Cooling System		Powerful Turbofan & cross flow fan					
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)					
		RAM	2G					
		Flash	8G EMMC					
		USB	USB2.0 HOST(X2)					
		LAN	10M/100M Ethernet(Network version screen only)					
		External memory	8GB SD card(up to 32G)					
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)					
		Media Resolution	1920*1080					
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)					
		Operating System	Android 7.1					
Certifi cation	Safety		CE ROHS IP66					
ccessories	Included		Scheduling software, Remote control, Key, Power cable, SD card,Wall mount bracket					
	Quality assurance		1 year （2-3 years optional）					
	Type of packaging		Carton box /honeycomb box + wooden case					

Screenage

PEOPLE WHO PRODUCE RESULTS. THAT'S US!



FACTORY



EXHIBITION HALL



WAREHOUSE

COMPANY PROFILE

- Company Name: Shenzhen Screenage Electronics Co., Ltd.
- Established in **2008**
- Focus area: Commercial LCD Display Product Development
- 10-Year Professional Manufacturer in Shenzhen,China
- Factory Total Area: **3000m2**
- Output: **100,000Pcs/Year**
- Product Range: Digital Signge, LCD Video Wall, Floor Standing Kiosk, Industrial LCD Monitor, All-in-one PC and LCD Interactive Whiteboard.
- Main Market: North America,Western Europe,Mid East,Eastern Europe, South America,Africa
- Certificate: **ISO9001,CE,EMC,RoHS**

Have questions?

We have answers!

Get answers about Pricing,Specifications,Installation,and more

CONTACT US NOW!

E-mail: info@screenage.cn

www.screenage.com