

Outdoor Wall-mounted Display

Sunlight Readable

Brightness is paramount when using outdoor screens these displays use commercial grade Ultra High Brightness panels (2,500 cd/m²), more than 10 times brighter than a standard home TV to allow easy readability in direct sunlight. The display also has an ambient light sensor that will alter the screens brightness based on the displays surrounding light levels. This leave sthe screen with the best clarity while also conserving energy.

Outdoor Enclosure

Designed with robust, corrosion protected, casing to protect against the elements and the public. With an IP65 rating, it keeps out all airborne particles as weel as being protected from any wet weather conditions and also feature waterproof over molded AV connectors. The enclosures are made from mild steel and have thermally toughened glass.

Temperature Control

The internal air-conditioning system allows the screens to be in constant use in an outdoor enrironment. Internal fans keep the panel and other internal components at the optimum working temperature; ensuring a long and reliable life for your display.

Easy Updates

Update the screen via the simple plug and play USB method. You can control the screen from anywhere in the world by upgrading to a Network version.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

Network CMS Upgrade

We also offer cloud basis network CMS if required,and you can run the third party Digital Signage software viaour Android PC board too.

Sturdy Enclosure

Made from mild steel,the enclosure is strong enough to protect the displays components from outside harm such as vandals.

Weather proof

An IP65 Rating means the display is able to withstand all weather conditions, wet and dry and also features waterproof over molded HDMI connectors.

Sunlight Readable | 24/7Usage | Touch Screen Upgrade | Android Media Player | Vandal Proof | Integrated Temperature Control | Steel Enclosure | Water Proof

Product Advantages

Outdoor wall mount commercial display




Product Features



Weather Proofing

Designed for outdoor purpose, all weather proofing!

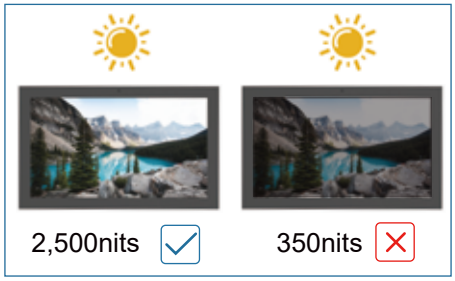


High Brightness Screen

Screen would get up to 2,500nits as 10 times more than normal display, makes the screen is readable even under the strong sunlight.



IK10 tempered glass

Our default option is tempered glass, but AR glass and AG glass would be upgrade as well.

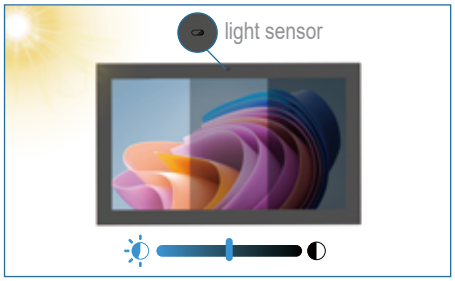

Automatic brightness control

The screen brightness would be adjust by the ambient light automaticly, it's not just save the energy, but also provide best image performance for the audience.



Touch Screen Upgrade

The screen can be upgraded to become a ten touch points Pro-Cap touch screen, create buttons and multiple playlists to make the screen get interactive.



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.

Specifications

Model			No.621				
Panel	Display Size(inch)		21.5"	32"	43"	49"	55"
	Resolution		1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
	Active Display Area(mm)		478(H) x 269(V)	679(H) x 392(V)	941(H) x 530(V)	1074(H) x 604(V)	1210(H) x 680(V)
	Aspect Ratio		16:09	16:09	16:09	16:09	16:09
	Brightness(cd/m2)		1500nit	2500nit	2500nit	2500nit	2500nit
	Contrast Ratio(Typ.)		3500:1	3500:1	3500:1	3500:1	3500:1
	Viewing Angle(H/V)		178/178				
	Color		16.7M				
	Response Time(G-to-G)		6ms				
	Operation Hour		24/7				
Sound	Loud Speaker		5W, 8Ω				
Power	Type		Internal				
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz				
	Power Consumption	Max[W/h]	100	200	320	400	520
		Sleep mode	less than 0.5W				
		Off mode	less than 0.5W				
Mechanical Spec	Protection Glass		Yes				
	Stand Type		Wall-mounted				
Environmental	Operating Environment Temperature		-10°C ~ 40°C(outdoor)				
	Operating Humidity		10% ~ 80 %				
	Storage Humidity		5% ~ 95%				
	Cooling System		Powerful Turbofan & cross flow fan				
	Hypothermia protection		Heater (aluminium sheet warmer) (Optional)				
OS	Android MediaPlayer	Processor	T972 (1.9GHz, octa core)				
		RAM	2G				
		Flash	16G EMMC				
		USB	USB2.0 HOST(X2)				
		HDMI	IN				
		LAN	10M/100M Ethemet(Network version screen only)				
		Exteral memory	8GB SD card(up to 32G)				
		Multimedia	VideO(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)				
		Media Resolution	3840*2160				
		Wi-Fi	802.11b/g'n Ethernet(Network version screen only)				
		Operating System	Android 9.0				
Certifi cation	Safety		CE ROHS IP65				
Accessores	Included		Remote control, Key, Power cable, SD card,Wall mount bracket				
	Quality assurance		1 Year (2-3 years optional)				
	Type of packaging		Carton box /honeycomb box + wooden case				

Specifications

Model			No.621			
Panel	Display Size(inch)		65"	75"	86"	98"
	Resolution		1920x1080	1920x1080	1920x1080	1920x1080
	Active Display Area(mm)		1429(H) x 804(V)	1651(H) x 929(V)	1896(H) x 1066(V)	2159(H) x 1215(V)
	Aspect Ratio		16:09	16:09	16:09	16:09
	Brightness(cd/m2)		3000nit	3000nit	3000nit	3000nit
	Contrast Ratio(Typ.)		3500:1	3500:1	3500:1	3500:1
	Viewing Angle(H/V)		178/178			
	Color		16.7M			
	Response Time(G-to-G)		6ms			
	Operation Hour		24/7			
Sound	Loud Speaker		5W, 8Ω			
Power	Type		Internal			
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz			
	Power Consumption	Max[W/h]	750	950	1150	1700
		Sleep mode	less than 0.5W			
		Off mode	less than 0.5W			
Mechanical Spec	Protection Glass		Yes			
	Stand Type		Wall-mounted			
Environmental	Operating Environment Temperature		-10°C ~ 40°C(outdoor)			
	Operating Humidity		10% ~ 80 %			
	Storage Humidity		5% ~ 95%			
	Cooling System		Powerful Turbofan & cross flow fan			
	Hypothermia protection		Heater (aluminium sheet warmer) (Optional)			
OS	Android MediaPlayer	Processor	T972 (1.9GHz, octa core)			
		RAM	2G			
		Flash	16G EMMC			
		USB	USB2.0 HOST(X2)			
		HDMI	IN			
		LAN	10M/100M Ethemet(Network version screen only)			
		Exteral memory	8GB SD card(up to 32G)			
		Multimedia	VideO(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)			
		Media Resolution	3840*2160			
		Wi-Fi	802.11b/g'n Ethernet(Network version screen only)			
		Operating System	Android 9.0			
Certifi cation	Safety		CE ROHS IP65			
Accessores	Included		Remote control, Key, Power cable, SD card,Wall mount bracket			
	Quality assurance		1 Year (2-3 years optional)			
	Type of packaging		Carton box /honeycomb box + wooden case			

Screenage

PEOPLE WHO PRODUCE RESULTS. THAT'S US!



FACTORY



EXHIBITION HALL



WAREHOUSE

COMPANY PROFILE

- Company Name: Screenage Technology
- Established in **2008**
- Focus area: Commercial LCD Display Product Development
- 10-Year Professional Manufacturer in Shenzhen,China
- Factory Total Area: **3000m²**
- Output: **100,000Pcs/Year**
- Product Range: Digital Signge, LCD Video Wall, Floor Standing Kiosk, Industrial LCD Monitor, All-in-one PC and LCD Interactive Whiteboard.
- Main Market: North America,Western Europe,Mid East,Eastern Europe, South America,Africa
- Certificate: **ISO9001,CE,EMC,RoHS**

Have questions?

We have answers!

Get answers about Pricing,Specifications,Installation,and more

CONTACT US NOW!

E-mail: info@screenage.com