
Screenage®



Transparent OLED Desktop Display



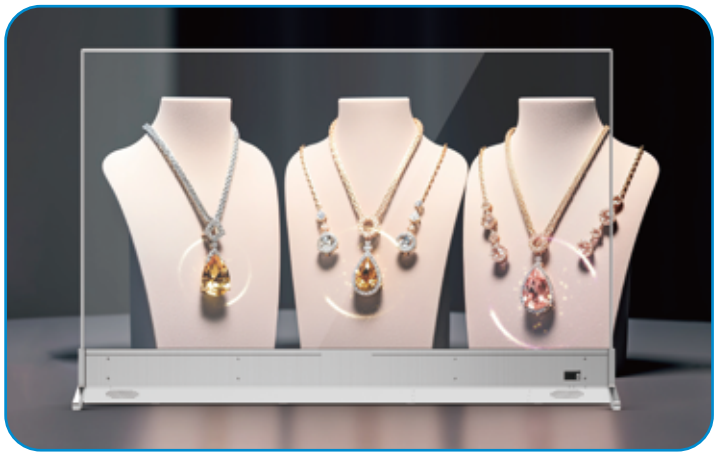

High Transparency

The 40% transparency rate enables natural light to pass through the display, creating a harmonious blend of digital content and physical surroundings. This not only enhances the viewing experience but also preserves the ambiance and aesthetics of the surrounding area.



Accurate and Vivid Colors

Featuring self-lighting pixels, the display maintains vivid colors and a high contrast ratio even when the display becomes transparent. It brings content to life from wide viewing angles, and the content blends into its surroundings seamlessly and naturally.



Protective Tempered Glass

Touching a display directly can cause damage or scratches. The tempered glass in front protects the product from such external impacts and its anti-shatter glass is designed to minimize customers' injuries.



Multi-Layering of Information

With the physical product displayed right behind the screen, the multi-layering function enables you to layer various types of content, such as images, videos, text, and interactive elements. This allows you to highlight different features, benefits, and use cases of the product, enhancing customer engagement and driving interest.

CONNECTIVITY

1. USB 2.0
2. USB 3.0
3. RJ45
4. Power input



Specifications

Model			OLED-W101
Panel	Display Size(inch)		55"
	Resolution		1920x1080 FHD
	Active Display Area(mm)		1209.6(H)x680.4(V)
	Aspect Ratio		16:09
	Brightness(cd/m2)		200-600cd/m² (Auto Adjust)
	Contrast Ratio(Typ.)		150000:1
	Viewing Angle(H/V)		178/178
	Color		16.7M
	Response Time(G-to-G)		1ms
	Use Life (typ.)		30,000 Hours
	Transparency		40%(Typ.)
Sound	Loud Speaker		10W*2
Power	Type		Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %),50/60 Hz
	Power Consumption	Max[W/h]	150
		Sleep mode	less than 0.5W
		Off mode	less than 0.5W
Mechanical Spec	Protection Glass		6mm
	material		Glass + sheet metal
	colour		White (customizable)
	Dimensions		1227mm×213mm×825mm
	Weight		45KG
	Stand Type		Floor-standing
Environmental	Operating Temperature		0°C ~ 40°C
	Storage Temperature		-20°C ~ 60°C
	Operating Humidity		10% ~90 %
	Storage Humidity		10% ~90 %
OS	Android Media Player	Processor	RK3399
		RAM	4GB DDR4
		Flash	32GB EMMC
		USB	USB3.0 HOST(X2)
		LAN	10M/100M Ethernet(Network version screen only)
		External memory	8G/16G/32G/64G
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)
		Media Resolution	1920*1080
		Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
		Operating System	Android 7.1

Company Name: Screenage Technology
Established in **2008**
Focus area: Commercial LCD Display Product Development
10-Year Professional Manufacturer in Shenzhen,China
Factory Total Area: **3000m²**
Output: **100,000Pcs/Year**
Tel: **+86 755 2335 2740**
E-mail: **info@screenage.com**

Screenage®

www.oledisplaytech.com