



LIFTBOY 5



The vertical platform lift up to 1300mm

The Liftboy 5 lift is built to carry a wheelchair and passenger safely up and down levels with up to 1300mm difference in height. The lift has a modern design with glass inserts in the sidewalls and upper gate. As an option to the automatic folding ramp the Liftboy 5 can also be equipped with a platform gate.

Suitable for installations in public and commercial buildings, as well as private homes, this lift suits virtually any project requirements and aesthetic needs and is ready to serve with its reliable performance, ease of use and range of finish options.

LIFTBOY 5

Simple Installation

The simple construction allows a fast installation with minimal structural works necessary on site.

Comfort

Optimal drive comfort is ensured by a stable and smooth lifting movement.

Reliable


Designed for outdoor and indoor installation, 2 strong actuators in combination with a double scissor mechanism ensure a reliable and low-maintenance performance.



Simple access guaranteed by a **long access ramp** and a minimal platform height when folded



Protection covers and protection bars on all 4 sides for highest safety









Lift can be delivered in any desired **RAL** colour



Access ramp instead of door on the platform

Main advantages of the Liftboy 5

- Possible platform sizes are 900x1400mm and 1100x1400mm
- Emergency power supply with 24V batteries located on the platform
- A low platform height of only 120mm and a long access ramp allow installation without a pit
- External controls are radio controlled
- Optional with door on platform
- Optional with automatic door opener
- Optional with glas shaft
- Overload device, emergency lowering on the platform and safety bars for up and downward drive for maximum safety


Access ramp creates a barrier at 1,1m height above the platform in line with the side walls








Controls on the platform with stop button, as well as LED indication of overload and low battery voltage

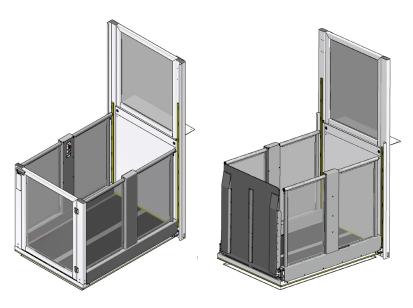

Schematic views of units with a door on the platform and with a access ramp on the platform

Liftboy 5 - Technical Specification

Facts		Construction ex
Loading capacity	300 kg	
Platform widths	900 or 1110 mm	
Platform length	1400 mm	
Minimal height of platform	120mm	
Lifting speed	25 mm/sec	
Drive sytem	24 V actuators with double scissor mechanism	_
Power supply	1 × 230V / 50-60Hz	
Temperature range	+45°C down to -15°C	
Minimum folded width	300 mm	
Power supply (for charger)	1 × 230V / 50-60Hz	¥ 4 Bi-



Together we provide accessibility!

For further information please contact:



Platform stairlifts



Chair stairlifts



Vertical platformlifts



Stairclimbers



Poollifts

Official partner of:

