


Description

The JSL-63-B2 is a compact SIP door phone with two quick call buttons, designed for straightforward access control and intercom communication. Equipped with a 2MP camera, multiple unlocking methods, and an IP65-rated rugged housing, it supports reliable one-touch audio and video calling. With SIP and ONVIF compatibility, it integrates easily into IP-based intercom and security systems, making it ideal for small offices, apartments, and secondary entrances.



Main Feature

-  2 quick call buttons with customlabel
-  Equipped with a 2megapixel HDR high-definition camera, it provides clearer imaging
-  IP65 high protection rating, wide temperature operation, suitable for harsh outdoor environments
-  Equipped with a wide range of interfaces for connecting various security devices
-  Supports the standard ONVIF protocol, providing high flexibility and excellent compatibility

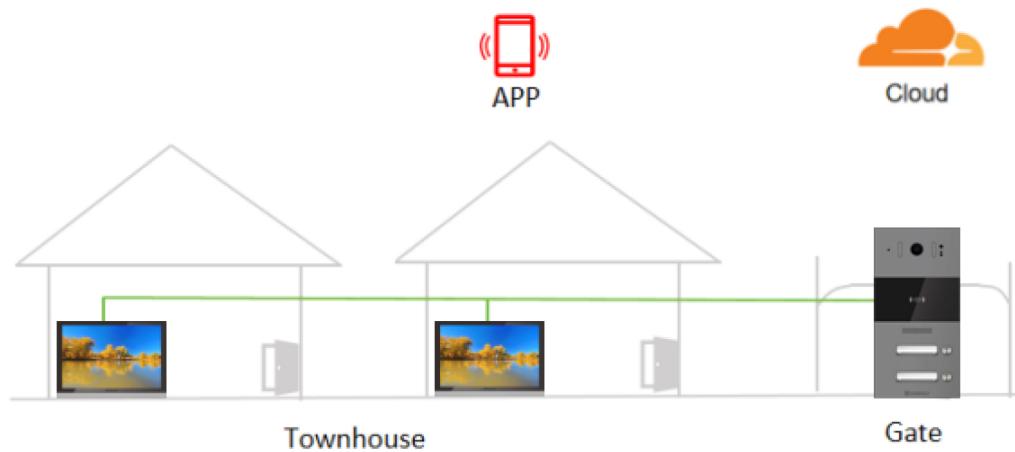


Specifications

Panel Type	Townhouse, Office, Small apartment
Screen/Keyboard	Quick call button×2
Body	Aluminum
Colors	Gunmetal
Sensor	1/2.9-inch, CMOS
Camera	2 Mpx, Support infrared
Viewing Angle	120°(Horizontal) 60°(Vertical)
Output Video	H.264 (Baseline, Main Profile)
Light Sensitivity	0.1Lux
Card Storage	10,000
Power Consumption	PoE: 1.70~6.94W Adapter: 1.50~6.02W
Power Supply	DC12V / 1A POE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage Temperature	-40°C~+70°C
Size of the Panel (LWH)	177.4x88x36.15mm
IP Level	IP65
Installation	Wall-mounted Flush-mounted(Need to purchase accessories separately: EX102)

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	IC/ID Card, By DTMF Code, Remote door opening
Interface	Wiegand Input/Output Short Circuit Input/Output RS485 (Reserve) Line out for induction loop
Supported Wiegand	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	Mifare Classic 1K/4K, Mifare DESFire, Mifare Ultralight, Mifare Plus Cards 13.56 MHz, Cards 125 kHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay, Open API, Motion detection, Tamper alarm, TF Card

Appearance and Interfaces

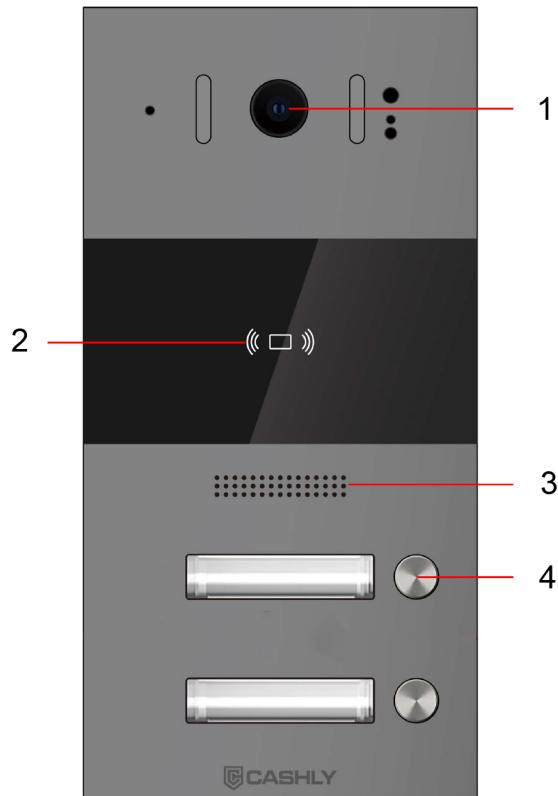

No.	Description
1	Camera
2	Card Reading Area
3	Speaker
4	Two Buttons

Dimension

